



# Valtek® FlowTop V750 / V752 General Service Control Valve

Get outstanding operating efficiency and performance with maximum versatility



*Experience In Motion*

## Optimized, configurable design provides maximum efficiency and versatility

Flowserve has improved the design of the Valtek FlowTop control valve to meet global requirements for general service and moderately severe service applications.

Building on the proven FlowTop GS and Valtek GS control valves, the new Valtek FlowTop valve provides one standardized, versatile control valve with precision control and a variety of trim and packing options to meet a broad range of requirements. The new FlowTop valve offers the same performance and options in an optimized product that's extremely easy to size, select, configure and order.

The fully integrated automated package is available globally and includes an in-line globe style body with a FlowAct pneumatic diaphragm actuator and digital positioner.

Furthermore, the new FlowTop valve design simplifies maintenance and enables cost savings through parts interchangeability.

### Proven quality and best-in-class general service performance

- Fully integrated package solution
- Globally available
- Easy to size and select
- High flow rates with excellent rangeability and repeatability
- Quick installation; simple setup
- Options available to minimize moderate noise and cavitation
- Packing options meet ISO 15848-1 Class B CC1 fugitive emission standards
- Global support for service and repair



# The performance you need with the versatility and ease of maintenance you want


**High-performance design** — A fully integrated package that features an updated streamlined design for maximum performance and operating efficiency in all general service applications.

**Easy to configure and globally available** — The updated design is easy to select, size, configure and order. The new FlowTop valve is available globally with numerous options to meet most general service requirements.


**Ease of maintenance** — A standardized design with interchangeable components simplifies maintenance and minimizes costs related to inventory and spare parts.

**Reduced environmental impact** — Packing options meet stringent fugitive emissions requirements (ISO 15848-1 Class B CC1).

**Broad application versatility** — Multiple seat designs (threaded or clamped), packing options (external or internal live loaded) and single-stage trim solutions for mild cavitation and noise reduction are available.

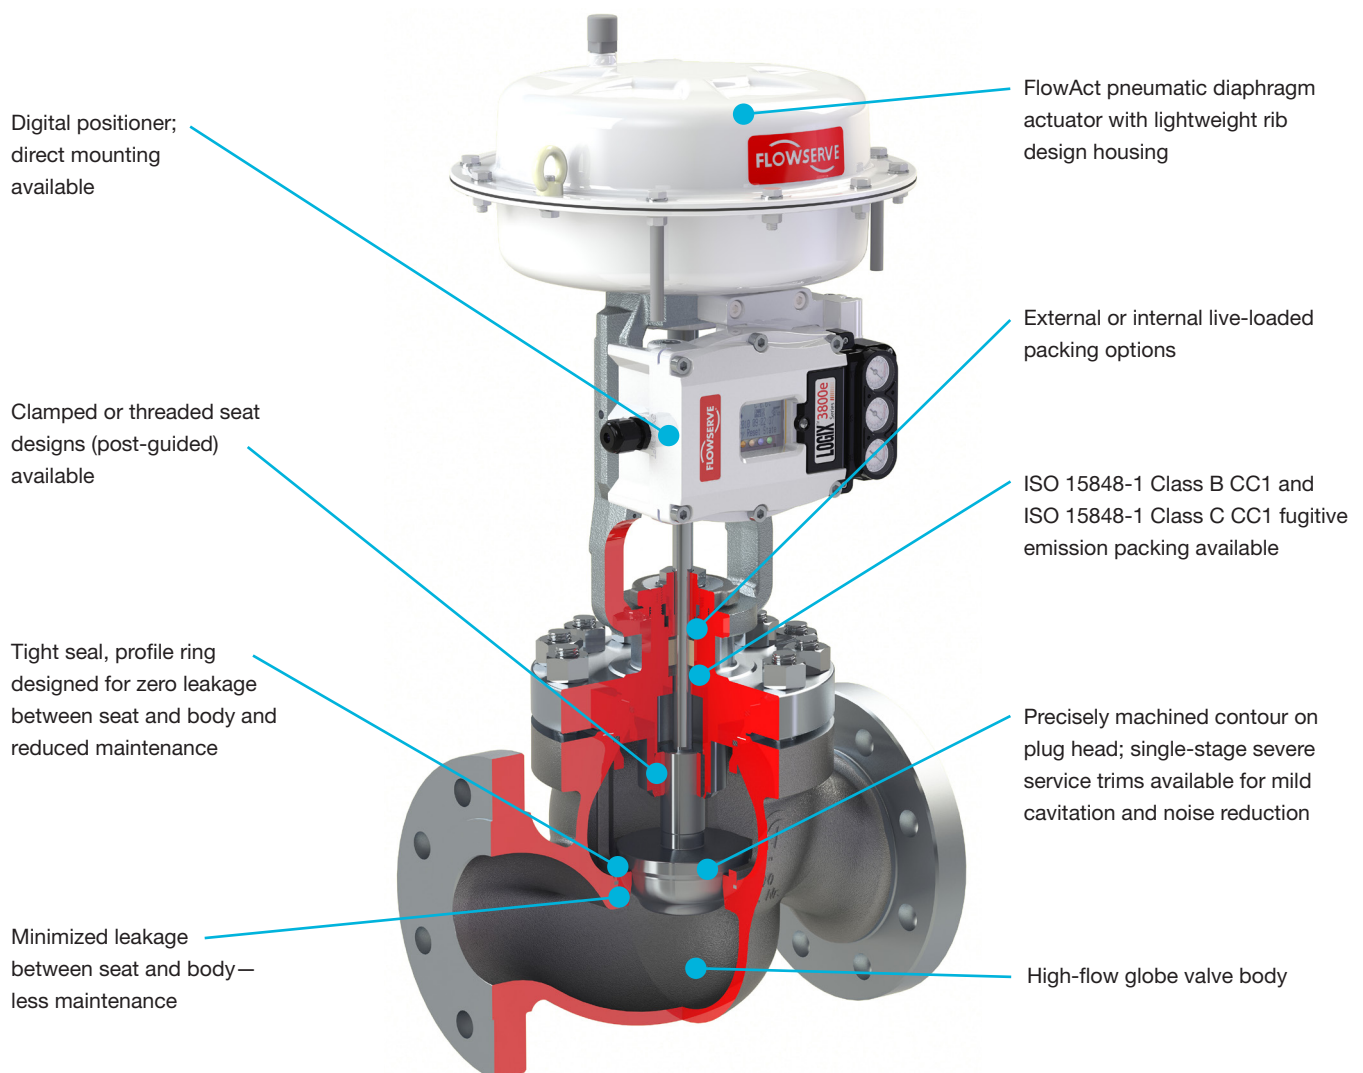

## Versatile configurations

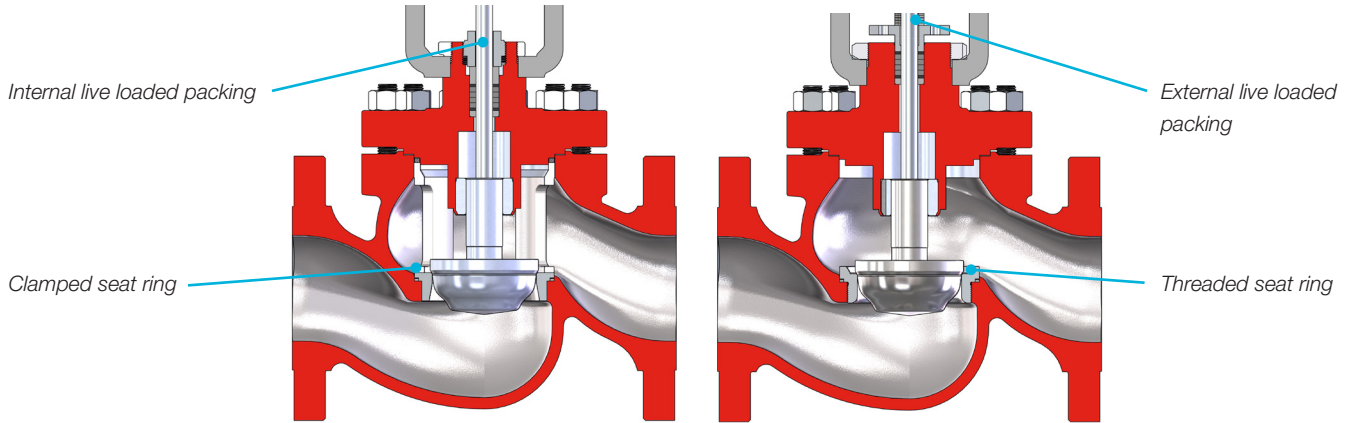

## Specifications and temperature ratings

<b>Style</b>	Globe, integral flange, ASME B16.34
<b>Sizes</b>	NPS ½ to 6
<b>Pressure classes</b>	ASME 150 and 300
<b>Temperature range</b>	Operating temperature: -46°C to 425°C (-51°F to 797°F) [depending on material and design] Ambient temperature: -40°C to 80°C (-40°F to 176°F) [FlowAct temperature range]
<b>End connection</b>	Flanged, raised face (RF)
<b>Body materials</b>	ASTM A216 WCC, ASTM A351 CF8M, ASTM A351 CF3M
<b>Face-to-face</b>	ISA 75.08.01
<b>Packing</b>	External or internal live loaded
<b>Bonnet</b>	Standard, extended, bellows seal
<b>Trim material</b>	316 SS, 316L SS; Alloy 6 overlay available on 316 SS and 316L SS
<b>Low noise and anti-cavitation</b>	MegaStream™ one-stage, CavStream™ one-stage
<b>Leakage rates</b>	Class IV, V and VI with optional soft seat
<b>Actuator</b>	Pneumatic diaphragm spring actuator; pneumatic piston actuator available
<b>Standard positioner</b>	Digital positioner; also available as integrally mounted to yoke for fail close air to open configuration; no tubing or bracket required

Flowserve Corporation  
 5215 North O'Connor Blvd.  
 Suite 700  
 Irving, Texas 75039-5421 USA  
 Telephone: +1 937 890 5839

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

©2022 Flowserve Corporation. All rights reserved. This document contains registered and unregistered trademarks of Flowserve Corporation. Other company, product, or service names may be trademarks or service marks of their respective companies.

VAFLY000326-00 (EN/AQ) March 2022